

Datasheet

Emergency Lighting Speedlux A27 L6

DESCRIPTION


Probably the easiest and fastest emergency lighting to mount !

- Universal pictogram included
- Available in 3 sizes, standard for wall and ceiling mounting
- Stylish and sleek design
- Aluminum profile
- LED lighting (low energy consumption and LED lifetime about 80 000hours)
- Clean mounting with transparent plastic gloves
- To protect equipment, lighting part must be mounted at the end of construction
- 5 years warranty on Lumatec LED emergency lighting
- Optional: monitoring system for self-contained and central battery system
- Optional: DALI compatible
- Optional: reduction of luminous flux for movie showtime (autotest disabled)



Standards : EN 60598-1, EN 60598-2-22, EN 61347-2-13, EN 61547, EN 61000-3-2, EN 55015, EN1838

DIMENSIONS (mm)

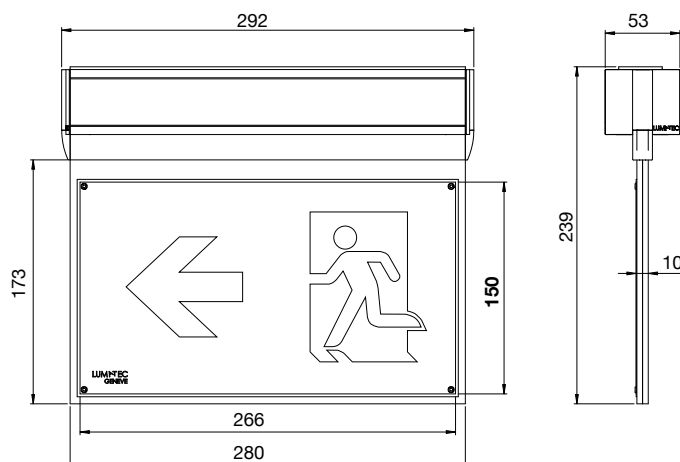

TECHNICAL CARATERISTICS

Distance of visibility :	15m VKF, 30m EN
Housing :	Aluminium anodized
Ingress Protection Rating :	IP40
Appliance class :	Class I
Lamp :	6 LED
Operating Temperature :	0 to 40°C

Self-contained

Input voltage :	230V 50-60Hz ±10%
Battery :	NiMH; 4.8V; 900mAh
Emergency duration :	3h
Power consumption :	1,0W (max. 5,0W on load)
BFL :	100%
Functioning test :	1min / month
Battery test :	3h / year
Weight :	1,15 Kg

Central Battery System

Input voltage:	110-230V AC 50/60Hz ±10%
	85-280VDC
Power consumption AC:	2 W
Power consumption DC:	1,5 W
Flux lumineux AC/DC :	100 %
Weight :	0,93 Kg




Lumatec SA
Tel.: +41 (0)22 - 884 11 11
contact@lumatec.ch



Lumatec SAS
Tel.: +33 (0)3 84 86 47 71
contact@lumatec.fr



MOUNTING (dimensions in mm)

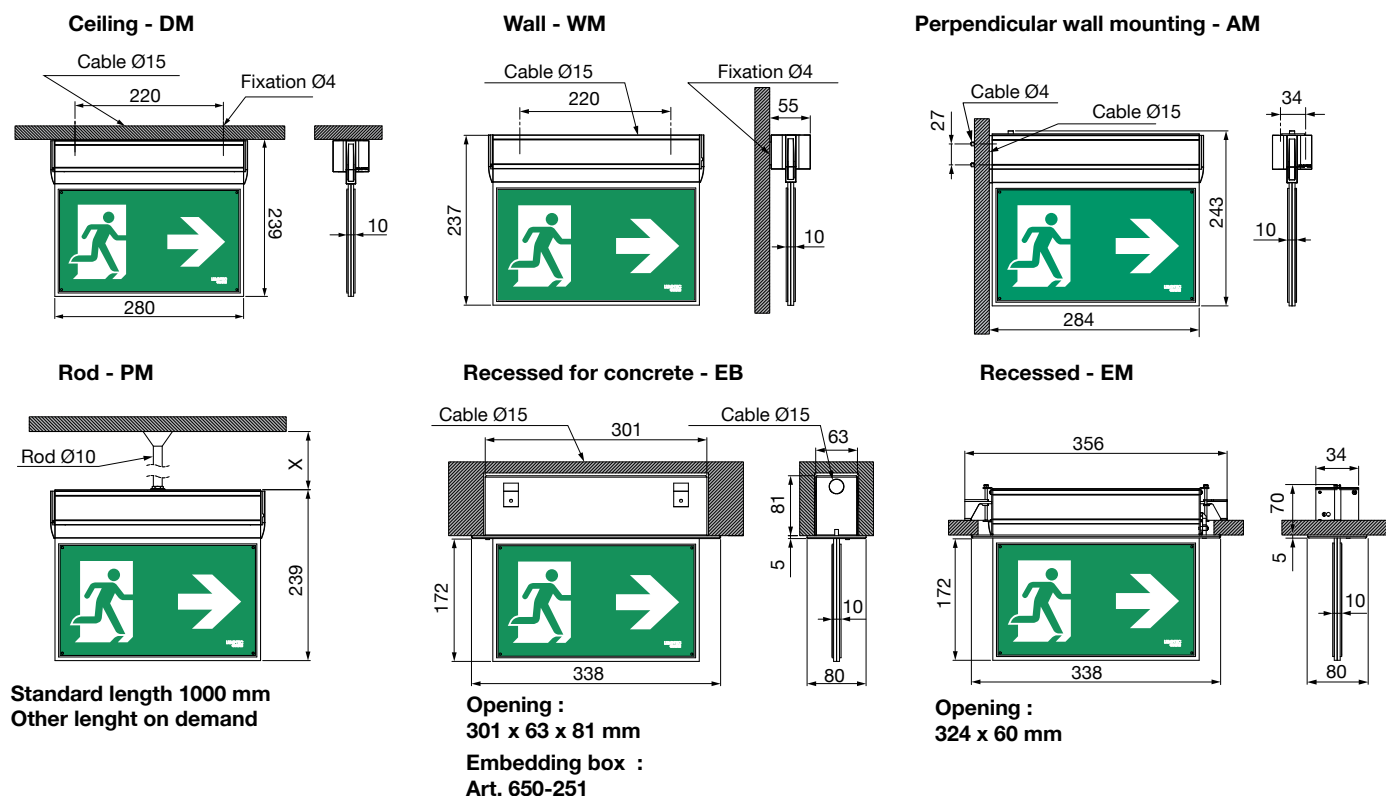

PICTOGRAMS (Distance of visibility 30 m VKF, 30 m EN)

Other versions on demand



Product code	Designation
220-1000	A27 200.26.22.30/6-LU

REFERENCES

Other versions on demand

Self-contained

Designation	Product code	Autotest	Emergency duration	Centraltest	Mounting
A27 L6RW3-TA-DM/WM	604-1000	Yes	3 h	Optional	Wall / Ceiling
A27 L6RW3-TA-EM	604-1003	Yes	3 h	Optional	Recessed
A27 L6RW3-TA-PM	604-1004	Yes	3 h	Optional	Rod
A27 L6RW3-TA-EB	604-1002	Yes	3 h	Optional	Recessed for concrete
A27 L6RW3-TA-AM	604-1010	Yes	3 h	Optional	Perpendicular

Central battery system

Designation	Product code	Centraltest	Mounting
A27 L6U220DM/WM	604-1001	Optional	Wall / Ceiling
A27 L6U220EM	604-1007	Optional	Recessed
A27 L6U220PM	604-1005	Optional	Rod
A27 L6U220EB	604-1006	Optional	Recessed for concrete
A27 L6U220AM	604-1011	Optional	Perpendicular

Mounting kit

Designation	Product code
A27 KIT PM	650-257
A27 KIT AM	650-258
A27 L6 RW KIT EM	650-265
A27 L6 U220 KIT EM	650-266
A27 L6 RW KIT EB	650-271
A27 L6 U220 KIT EB	650-272



Lumatec SA
Tel.: +41 (0)22 - 884 11 11
contact@lumatec.ch



Lumatec SAS
Tel.: +33 (0)3 84 86 47 71
contact@lumatec.fr

